

EXPERT

2,0 kW



3,5 kW

2,5 kW

4,2 kW

5,0 kW

7,1 kW

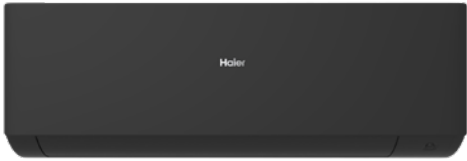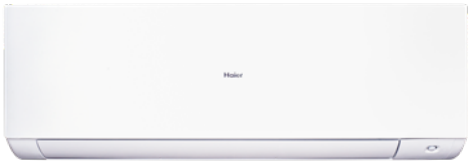

MODEL	Indoor		AS20XCAHRA	AS25XCAHRA	AS35XCAHRA	AS42XCAHRA-1	AS50XCAHRA	AS71XCAHRA
			AS20XCAHRA-MB	AS25XCAHRA-MB	AS35XCAHRA-MB	AS42XCAHRA-MB1	AS50XCAHRA-MB	AS71XCAHRA-MB
Performance data								
Output power - COOLING	nom (min-max)	kW	2,00	2,80 (0,80-3,20)	3,50 (1,00-4,00)	4,2 (1,20-4,80)	5,00 (1,40-5,50)	6,2(2,20-7,0)
Output power - HEATING	nom (min-max)	kW	2,50	3,20 (0,80-4,20)	4,20 (1,00-5,20)	4,4 (1,30-5,80)	5,60 (1,70-6,20)	6,8(2,40-7,80)
Power Supply		Ph/V/Hz	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50
Interconnection cable			4 x 1,0	4 x 1,0	4 x 1,0	4 x 1,0	4 x 1,0	4 x 1,0
Treated air volume	H	m3/h	730	730	800	880	880	920
Indoor Unit								
High sound power - COOLING		dB	56	56	57	60	60	65
High sound power - HEATING		dB	56	56	57	60	60	65
Sound pressure - COOLING		dB(A)	39/32/25/16	39/32/25/16	40/33/26/17	45/37/29/21	45/37/29/20	47/45/37/29
Sound pressure - HEATING		dB(A)	39/32/25/16	39/32/25/16	40/33/26/17	45/37/29/21	45/37/29/20	47/45/37/29
Net dimensions	WxDxH	mm	895x313x236	895x313x236	895x313x236	895x236x313	895x313x236	895x313x236
Packaging dimensions	WxDxH	mm	964x386x316	964x386x316	964x386x316	964x386x316	964x386x316	964x386x316
Net/gross weight		kg	11,3/14,0	11,3/14,0	11,3/14,0	11,6/14,2	11,6/14,2	12,4/14,8
Installation data								
Liquid pipe	Ø	mm (inch)	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)	9,52 (3/8)
Gas pipe	Ø	mm (inch)	9,52 (3/8)	9,52 (3/8)	9,52 (3/8)	9,52 (3/8)	12,70 (1/2)	15,88 (5/8)
Controller								
Standard			HQ-HJ	HQ-HJ	HQ-HJ	HQ-HJ	HQ-HJ	HQ-HJ