

Haier

EXPERT

2,0 kW



3,5 kW

2,5 kW

4,2 kW

5,0 kW

7,1 kW

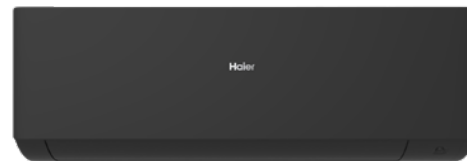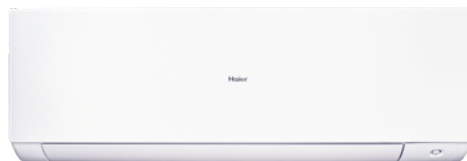

MODELL	Innen		AS20XCAHRA	AS25XCAHRA	AS35XCAHRA	AS42XCAHRA-1	AS50XCAHRA	AS71XCAHRA
			AS20XCAHRA-MB	AS25XCAHRA-MB	AS35XCAHRA-MB	AS42XCAHRA-MB1	AS50XCAHRA-MB	AS71XCAHRA-MB
Leistungsdaten								
Ausgangsleistung – KÜHLUNG	nom (min-max)	kW	2,00	2,80 (0,80–3,20)	3,50 (1,00–4,00)	4,2 (1,20–4,80)	5,00 (1,40–5,50)	6,2(2,20–7,0)
Ausgangsleistung – HEIZUNG	nom (min-max)	kW	2,50	3,20 (0,80–4,20)	4,20 (1,00–5,20)	4,4 (1,30–5,80)	5,60 (1,70–6,20)	6,8 (2,40–7,80)
Stromversorgung		Ph/V/Hz	1/220–240/50	1/220–240/50	1/220–240/50	1/220–240/50	1/220–240/50	1/220–240/50
Verbindungskabel			4 x 1,0	4 x 1,0	4 x 1,0	4 x 1,0	4 x 1,0	4 x 1,0
Aufbereitete Luftmenge	H	m3/h	730	730	800	880	880	920
Innengerät								
Hohe Schallleistung – KÜHLUNG		dB	56	56	57	60	60	65
Hohe Schallleistung – HEIZUNG		dB	56	56	57	60	60	65
Schalldruck - KÜHLUNG		dB(A)	39/32/25/16	39/32/25/16	40/33/26/17	45/37/29/21	45/37/29/20	47/45/37/29
Schalldruck - HEIZUNG		dB(A)	39/32/25/16	39/32/25/16	40/33/26/17	45/37/29/21	45/37/29/20	47/45/37/29
Netto-Abmessungen	BxTxH	mm	895x313x236	895x313x236	895x313x236	895x236x313	895x313x236	895x313x236
Abmessungen der Verpackung	BxTxH	mm	964x386x316	964x386x316	964x386x316	964x386x316	964x386x316	964x386x316
Netto-/Bruttogewicht		kg	11,3/14,0	11,3/14,0	11,3/14,0	11,6/14,2	11,6/14,2	12,4/14,8
Installationsdaten								
Flüssigkeitsleitung	Ø	mm (Zoll)	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)	9,52 (3/8)
Gasleitung	Ø	mm (Zoll)	9,52 (3/8)	9,52 (3/8)	9,52 (3/8)	9,52 (3/8)	12,70 (1/2)	15,88 (5/8)
Steuerung								
Standard			HQ-HJ	HQ-HJ	HQ-HJ	HQ-HJ	HQ-HJ	HQ-HJ