

Haier

More Creation, More Possibilities

Haier

HVAC Solutions



REVIVE PLUS

REVIVE YOUR SPACE WITH
COMFORT AND EFFICIENCY

Haierhvac.eu

REVIVE PLUS


Residential Mono-Split Inverter

2,5 kW


5,0 kW

3,5 kW

7,1 kW



Features



Self Clean



56° Steri-Clean



Integrated Wi-Fi Control



3-Level-Eco



Wi-Fi Easy Pair



I Feel



Easy Installation



Coanda Plus



Self-Clean

Our Self-Clean technology is the first of its kind to integrate the self-cleaning function of the evaporator and the condenser. It starts with cleaning the evaporator, then moves on to cleaning the condenser without stopping the compressor.

This innovative technology allows you to kill bacteria and keep the evaporator clean. It freezes the surface of the evaporator in contact with moisture in the air and eliminates dust in the defrosting process, thus ensuring the release of clean air.



hOn Wi-Fi

The integrated Wi-Fi control, through the Haier hOn App, enables you to take control of the Revive Plus from a single app on your smartphone or tablet. The hOn app allows you to manage all basic functions and much more and it is available on Android and iOS.

The new simple Easy Pairing feature enables you to pair your device and the unit by selecting the Wi-Fi button on the controller for ease of use.




3-Level-Eco

The 3-Level-Eco is a new energy saving function which gives you the flexibility to set your Eco mode at 3 different levels.

It will truly help you to manage your energy consumption with savings that can reach up to 20%, 35% and 55% by limiting the compressor frequency.

Technical Illustrations

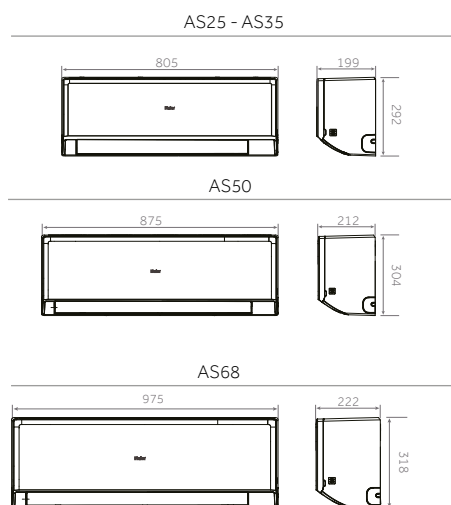

Outdoor Unit



2,5 kW - 3,5 kW




5,0 kW - 6,8 kW




Standard YR-HE2

Outdoor Dimensions



1U25 - 1U35




1U50 - 1U68

INDOOR UNIT			Model	AS25RBAHRA-3	AS35RBAHRA-4	AS50RCBHRA-4	AS68RDAHRA-4
OUTDOOR UNIT			Model	1U25YESFRA-3	1U35YESFRA-4	1U50MERFRA-4	1U68MRAFRA-4
Performance data							
Output power - COOLING	nom (min-max)	kW		2,7 (0,7-3,4)	3,2 (0,8-3,8)	4,8 (1,3-5,4)	6,2 (1,3-7,4)
Output power - HEATING	nom (min-max)	kW		2,9 (0,7-3,6)	3,9 (0,7-4,0)	4,8 (1,3-5,4)	6,3 (1,4-7,5)
Absorbed power - COOLING	nom (min-max)	kW		0,84 (0,3-1,1)	1,19 (0,3-1,3)	1,7 (0,4-1,9)	2,0 (0,4-2,2)
Absorbed power - HEATING	nom (min-max)	kW		0,78 (2,3-1,2)	1,42 (0,4-1,6)	1,33 (0,4-1,9)	1,75 (0,6-2,3)
Energy class	EER	W/W		3,23	2,94	2,81	3,1
	COP	W/W		3,71	2,74	3,6	3,61
COOLING Pdesign	35 °C	kW		2,7	3,2	4,8	6,2
HEATING Pdesign	(-10 °C)	kW		2,6	3,0	3,6	4,6
Energy class	SEER			6,5 (A++)	6,1 (A++)	6,3 (A++)	6,7 (A++)
	SCOP			4,0 (A+)	4,0 (A+)	4,0 (A+)	4,0 (A+)
Annual Energy Consumption - COOLING		kWh/a		145	184	267	324
Annual Energy Consumption - HEATING		kWh/a		910	1050	1260	1610
Indoor Unit							
Power supply		Ph/V/Hz		1/220-240/50	1/220-240/50	1/220-240/50	1/220-240/50
Treated air volume	H	m ³ /h		610/550	620	770/810	1100/1000
Dehumidification		L/h		1,2	1,2	2	2,8
High sound power - COOLING		dB		54	59	60	64
High sound power - HEATING		dB		54	59	60	64
Sound pressure - COOLING		dB(A)		37/32/28/18	38/33/29/18	44/40/35/28	47/45/37/29
Sound pressure - HEATING		dB(A)		37/32/28/18	38/33/29/18	44/40/35/28	47/45/37/29
Net dimensions	WxDxH	mm		805x199x292	805x199x292	875x212x304	975x222x318
Packaging dimensions	WxDxH	mm		876x365x272	876x272x365	945x390x296	1050x397x301
Net/gross weight		kg		8,8/10,5	8,8/10,9	10,0/12,0	11,6/14,4
Outdoor Unit							
Power supply		Ph/V/Hz		1PH/220-240/50	1PH/220-240/50	1PH/220-240/50	1PH/220-240/50
Power Cable		N x mm ²		3 x 1,0	3 x 1,0	3 x 2,5	3 x 2,5
Interconnection cable		N x mm ²		4 x 1,0	4 x 1,0	4 x 1,0	4 x 1,0
Sound power	H	dB		63	64	65	68
Sound pressure	H	dB(A)		49	51	54	57
Running current cooling/heating	Max	A		5,3/6,4	5,6/7,3	8,6	10/10,5
Starting current cooling/heating	Max	A		1,5/1,5	1,5/1,5	2,0/2,0	2,0/2,0
Net dimensions	WxDxH	mm		700x245x544	700x245x544	800x275x553	800x275x553
Packaging dimensions	WxDxH	mm		819x320x592	819x320x592	902x375x607	902x375x607
Net/gross weight		kg		23,6/26	22,0/24,6	29,2/32,1	32,7/36,5
Compressor type				Rotary inverter	Rotary Inverter	Rotary Inverter	Twin rotary inverter
Installation data							
Refrigerant				R32	R32	R32	R32
Liquid pipe	Ø	mm (inch)		6,35 (1/4)	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)
Gas pipe	Ø	mm (inch)		9,52 (3/8)	9,52 (3/8)	12,70 (1/2)	12,70 (1/2)
Standard pipe length without refrigerant charge		m		5	5	7	7
Maximum pipe length		m		20	20	20	25
Maximum IU - OU elevation		m		10	10	15	15
Refrigerant charge in the factory		kg		510	0,51	0,78	0,90
Refrigerant charge in the factory		TCO2eq		0,34	0,34	0,53	0,61
Additional ref. charge over std length		g/m		20	20	20	20
Operating limits - COOLING (in/out)	min-max	°C		21-35/-20-43			
Operating limits - HEATING (in/out)	min-max	°C		10-27/-20-24			

Haier
HVAC Solutions

REVIVE PLUS

Residential Mono-Split Inverter



Haier HVAC
haierhvac.eu