

SQM1/SQM2 - ES10/15/30V



Shock Proof

Ensuring safety for all users.



Single-weld Line Tank

Durable and anti corrosive technology.



310S+Mo Heating Element

High anti-corrosion Mo alloy coating, 4 times that of the common heating element.





High Efficiency

Max energy efficiency with ErP class A.



Titanium Coating Tank

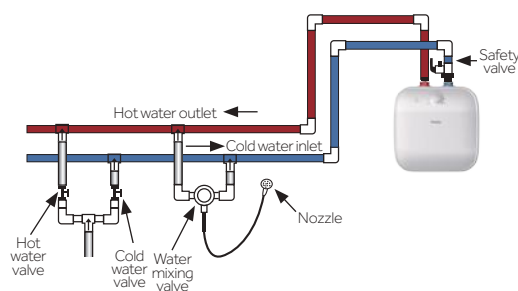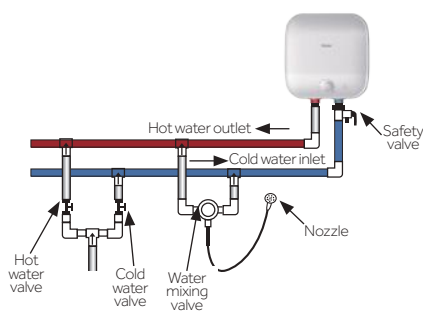

Model	ES10V-SQM1	ES10V-SQM2	ES15V-SQM1	ES15V-SQM2	ES30V-SQM1	ES30V-SQM2
Load profile	Vertical	XXS	XXS	XXS	S	S
Energy class	A	A	A	A	C	C
Energy efficiency (%)	36	35	35	36	33.72	32.3
Annual electricity consumption (kWh)	508	527	520	507	547	571
Sound power level indoors (dB)	10.8	8.32	/	13.14	43.8	40
V40 (L)	10.8	8.32	/	15	15	15
Rated voltage/frequency (V/Hz)	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50	220-240/50
Rated power (W)	1500	1500	1500	1500	1500	1500
Rated temperature (°C)	75	75	75	75	75	75
Water-proof grade	IPX4	IPX4	IPX4	IPX4	IPX4	IPX4
Rated pressure (bar)	7.5	7.5	7.5	7.5	8.5	8.5
Packing dimensions W/D/H (mm)	360*270*360	360*270*360	360*340*360	360*340*360	445*380*445	445*380*445
Net weight (kg)	7	7	8.5	8.5	14	14
Gross weight (kg)	8.5	8.5	10	10	16	16
Qty.40HQ	1156	1156	870	870	600	600