


M7 HPWH R290




HP200M7-F9 - HP250M7-F9 - HP200M7C-F9 - HP250M7C-F9

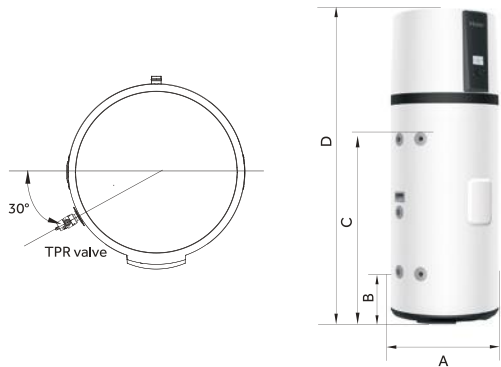

Model	A	B	C	D
HP200M7-F9	620	270	980	1694
HP250M7-F9	620	270	1275	1989
HP200M7C-F9	620	270	980	1694
HP250M7C-F9	620	270	1275	1989

Unit: mm

M7 TECHNICAL PARAMETERS

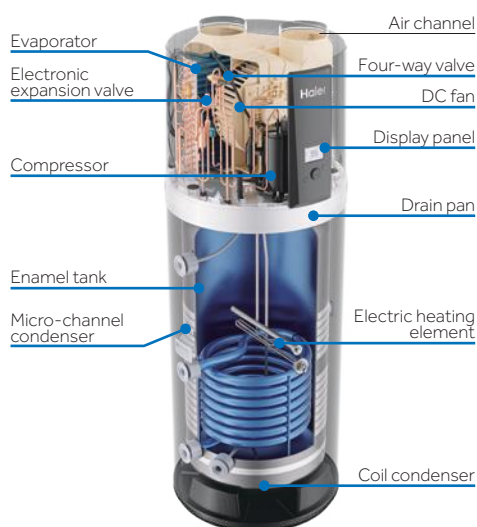

FEATURES

- The R290 refrigerant offers excellent thermodynamic performance, allowing for higher water temperatures
- Full inverter technology and micro-channel condenser, resulting in lower energy consumption and higher heating efficiency
- Micro-channel condenser upgraded for R290 refrigerant
- Dual power heating, enables faster hot water production
- Equipped with a TFT screen and smart connectivity
- Easy install


Model		HP200M7-F9	HP200M7C-F9	HP250M7-F9	HP250M7C-F9
Total cylinder capacity	L	194	185	250	240
Rated voltage/frequency	V/Hz	220-240/50	220-240/50	220-240/50	220-240/50
Tank Max pressure	bar	7	7	7	7
Thermal insulation	mm	50	50	50	50
Corrosion protection		Magnesium rod	Magnesium rod	Magnesium rod	Magnesium rod
Energy class		A+	A+	A+	A+
Insulation protection rating		IPX4	IPX4	IPX4	IPX4
Performance					
COP@7°C(EN16147)		3.26	3.24	3.21	3.21
COP@14°C(EN16147)		3.50	3.50	3.45	3.45
Max air quantity	m³/h	300	300	300	300
Power input by electric backup	W	1500	1500	1500	1500
Rated power input by heat pump	W	320	320	320	320
Maximum power input by heat pump	W	535	535	535	535
Maximum power input	W	2035	2035	2035	2035
Heating water capacity	L/h	24	24	24	24
Heating up time(10°C/55°C)@7°C	h	7.8	6.71	10.51	10.09
Default temperature setting	°C	65	65	65	65
Temperature setting range-with heater	°C	35-75	35-75	35-75	35-75
Maximum temperature output for the heat pump only	°C	65	65	65	65
Refrigerant type/weight	kg	R290/0.15	R290/0.15	R290/0.15	R290/0.15
Noise power dB(A) @7°C	dB(A)	50	50	50	50
Sound pressure at 1m	dB(A)	36	36	36	36
V40 @7°C	L	234	229	313	314.4
Ambient temperature of heat pump	°C	-7-45	-7-45	-7-45	-7-45
Dimensions and connections					
Water inlet and outlet connection		Rp 3/4 Large Flow	Rp 3/4 Large Flow	Rp 3/4 Large Flow	Rp 3/4 Large Flow
TPR valve connection		Rp 3/4	Rp 3/4	Rp 3/4	Rp 3/4
Drain & water inlet connection		Rp 3/4	Rp 3/4	Rp 3/4	Rp 3/4
Product dimensions	(mm)	600 × 620 × 1694	600 × 620 × 1694	600 × 620 × 1989	600 × 620 × 1989
Packing dimension with pallet	(mm)	736 × 695 × 1940	736 × 695 × 1940	736 × 695 × 2250	736 × 695 × 2250
Net/gross weight	kg	86/109	96/119	98/121	107/131
Filled weight of the appliance	kg	281	282	345	348

*The COP and noise level data was tested in Haier lab.

The COP values obtained with external air temperature of 7°C and 14°C, inlet water temperature of 10°C and set temperature of 55°C (according to EN 16147).



R290



Micro-Channel Condenser



Up to 65°C



Dual Power Heat



Child Lock



36dB



hOn Wifi



Enamel Tank

