



MS1-036A  
MS1-060A




MS3-036A



| Model                                         |         | MS1-036A                   | MS1-060A             | MS3-036A                                          |
|-----------------------------------------------|---------|----------------------------|----------------------|---------------------------------------------------|
| Max number of indoor units                    | No.     | 1                          | 1                    | 3                                                 |
| Maximum connectable indoor unit capacity      | Btu/h   | ≤ 36Kbtu                   | 36Kbtu - 60Kbtu      | ≤ 36Kbtu per single output (Tot. max 108Kbtu)     |
|                                               | kW      | 11,2                       | 11,2 to 18,0 kW      | Max 33,6 kW (max 11,2 kW per single output)       |
| Power supply                                  | V-Ph-Hz | 220~230-1-50/60            | 220~230-1-50/60      | 220~230-1-50/60                                   |
| Dimensions WxDxH                              | mm      | 310x217x155                | 310x217x155          | 394x227x253                                       |
| Shipping Dimensions WxDxH                     | mm      | 509x285x209                | 509x285x209          | 687x295x303                                       |
| Net weight                                    | Kg      | 5                          | 5                    | 9                                                 |
| Material                                      |         | Galvanised steel           | Galvanised steel     | Galvanised steel                                  |
| Colour                                        |         | Grey                       | Grey                 | Grey                                              |
| Liquid pipe Ø                                 | mm      | 9,52 (male) / 6,35         | 9,52 (male) / 12,7   | 6,35 (male) / 9,52 - 9,52 (male) / 12,7           |
| Gas pipe Ø                                    | mm      | 15,88 (male) / 12,7 / 9,52 | 19,05 (male) / 15,88 | 19,05 (male) / 15,88 - 15,88 (male) / 12,7 / 9,52 |
| Connection type                               |         | Flare connection           | Flare connection     | Flare connection                                  |
| Maximum piping length (BOX - IU)              | m       | 15                         | 15                   | 15                                                |
| Maximum height difference of pipes (BOX - IU) | m       | 15                         | 15                   | 15                                                |

AS25 - AS35 - AS42

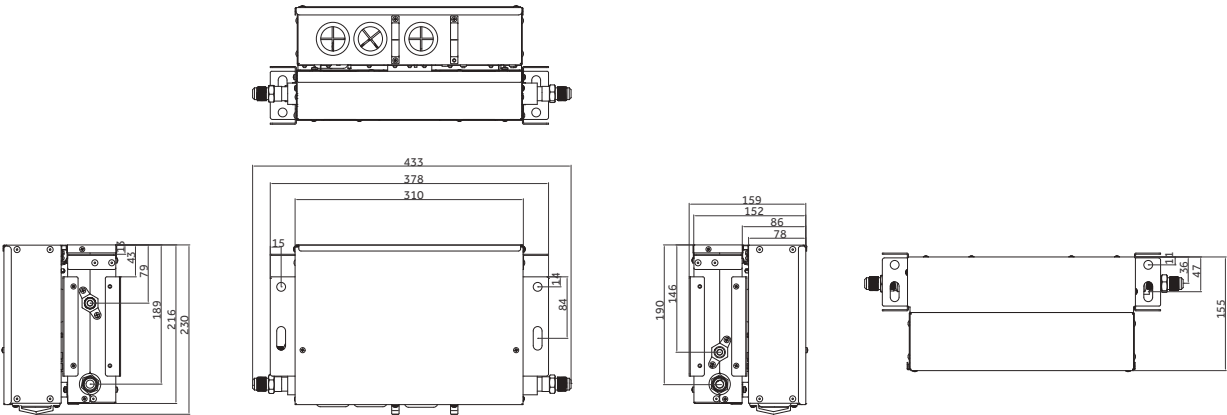

AS25 - AS35 - AS42

