


EXPERT White

AS20XCAHRA
AS25XCAHRA
AS35XCAHRA
AS50XCAHRA

EXPERT Black

AS20XCAHRA-MB
AS25XCAHRA-MB
AS35XCAHRA-MB
AS50XCAHRA-MB

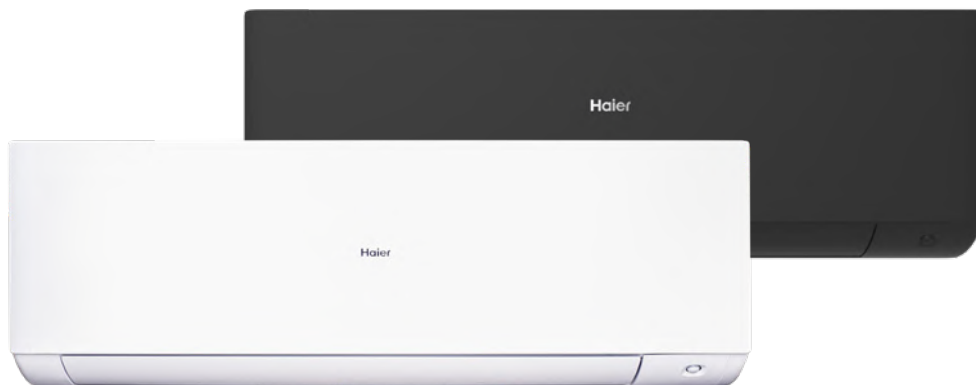

Optional controller
HW-BA101ABT



Optional controller
HW-SA201ABK



Optional remote control
YR-HQS01

- Silent performance, down to 16db(A) 2,0kW and 2,5kW
- External EEV modulation valve
- ECO presence sensor to optimize the energy consumption and the airflow
- Standard Wi-Fi with hOn App
- 3D ventilation
- Easy installation thanks to the removable part in the bottom of the unit that gives access to the piping

MS1-036A/MS1-060A



MS3-036A



Model		AS20XCAHRA	AS25XCAHRA	AS35XCAHRA	AS50XCAHRA
		AS20XCAHRA-MB	AS25XCAHRA-MB	AS35XCAHRA-MB	AS50XCAHRA-MB
Capacity					
Cooling	kW	2.00	2.80	3.50	5.00
Heating	kW	2.50	3.20	4.20	6.00
Electrical Parameters					
Power supply	Ph/V/Hz	1/220-240/50			
Ventilation					
Air flow (H)	m³/h	730	730	800	880
Sound pressure (H/M/L)	dB(A)	39/32/16	39/32/16	40/33/17	45/37/20
Sound power	dB(A)	56	56	57	60
Installation – Dimensions					
Net dimensions (WxDxH)	mm	895x313x236	895x313x236	895x313x236	895x313x236
Packaged unit dimensions (WxDxH)	mm	964x386x316	964x386x316	964x386x316	964x386x316
Net/gross weight	Kg	11,3/14	11,3/14	11,3/14	11,6/14,2
Ø Liquid pipe	mm (inch)	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)	6,35 (1/4)
Ø Gas pipe	mm (inch)	9,52 (3/8)	9,52 (3/8)	9,52 (3/8)	12,7 (1/2)

*Easy MRV kit needed to integrate with MRV system.



WK-B

^WK-B necessary to connect split high walls with wired controller